

INTERACTIVE
CATALOG

kinglyslate[®]





Stone

Stone is one of the oldest and most enduring materials in architecture. From Egypt's pyramids to Europe's cathedrals and the pre-Hispanic structures of the Americas, it has long been valued for its strength, natural beauty, and rich variety of forms and colors.

Today, stone has evolved—now available in lighter, more adaptable, flexible, and easily transportable formats all applied in a 3/32"-thick sheet called KinglySlate®.

INDEX

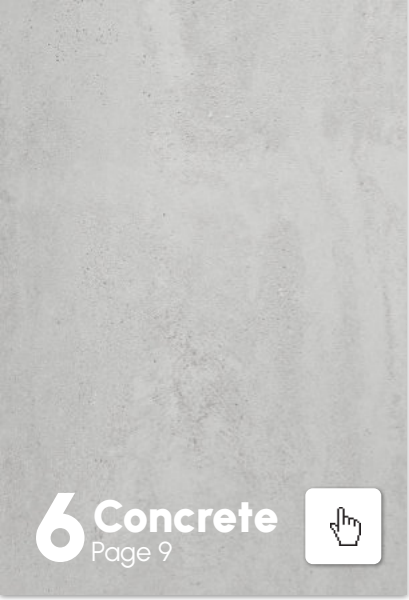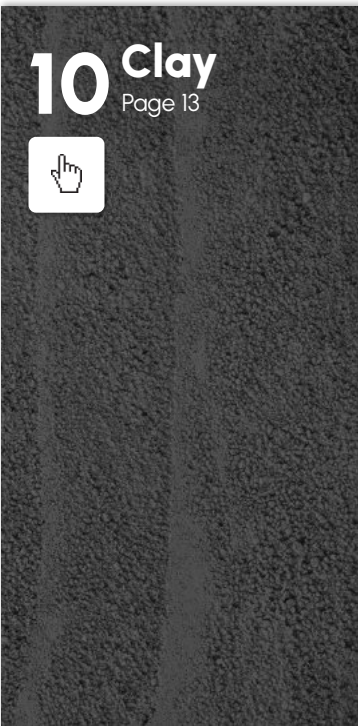 1 Slates Page 4	 2 Quartzite Page 5	 4 Marble Page 7	 5 Translucent Page 8	 6 Concrete Page 9	 7 Metal Page 10	 8 Wood Page 11	 9 Travertine Page 12	 10 Clay Page 13
 3 3D Peel & Stick Page 6								



WHAT IS KINGLYSLATE®?

KinglySlate® is a light and flexible natural stone cladding material that is obtained by a delamination technique that extracts a thin layer of natural stone. This layer is joined with resin and fiberglass that gives it resistance and adaptability. KinglySlate® can be adhered to almost any construction surface and has multiple benefits such as durability, lightweight, ease of installation and cleaning.

KinglySlate® concrete, metal and wood are manufactured by means of a mixture of minerals or liquid metals with resin obtaining a result of sheets with adaptable and light flexible natural finishes.



HOW IS EXTRACTED?

To obtain a thin layer of natural stone (3/32" thick), fiberglass and resin are applied to the upper layer of the block; subsequently the stone layer is detached and extracted. The fiberglass and resin remain on the back of the extracted sheet, providing resistance and flexibility. The extraction process is unique and allows obtaining up to 300 sheets of KinglySlate® from a 10-inches thick block of natural stone.



TESTED BY
intertek
Total Quality. Assured.



- KinglySlate® was tested in USA by INTERTEK
- AST E84. Standard Test Method for Surface Burning Characteristics of Building Materials.
 - ASTM C297. Flatwise Tensile Strength.
 - ASTM C481. Resistance to Laboratory Aging.
 - AST D696. Coefficient of Thermal Expansion Evaluation for KinglySlate® Slim Profile Natural Stone Cladding Product.





INDEX ▲

SLATES

3/32" thick sheets extracted from slate-type stone blocks, by a delamination process with fiberglass and resin, which in turn provide resistance, strength, support and flexibility.

Finish

Matte, non-homogeneous surface with multidirectional veining and a distinct, natural texture.

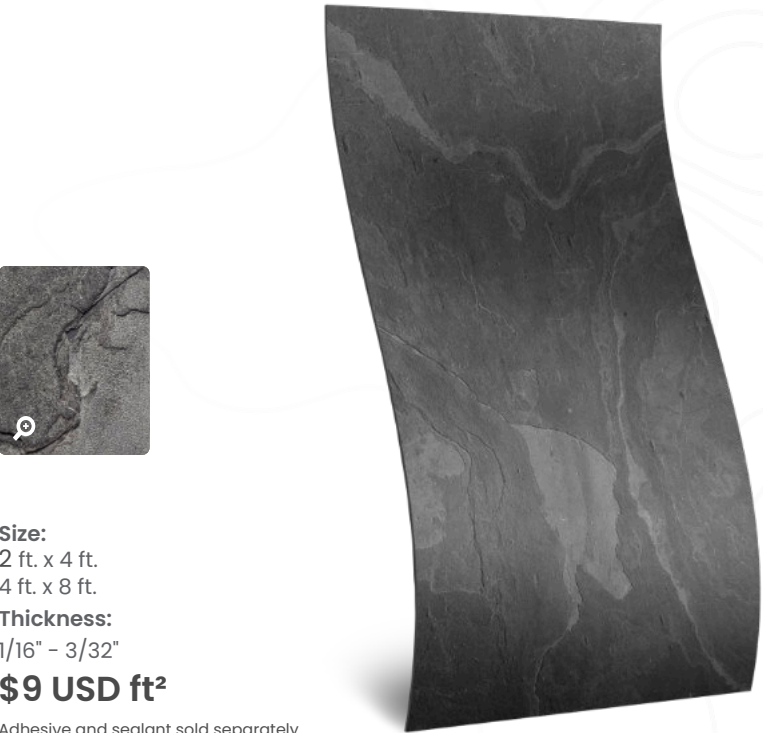

Size:

2 ft. x 4 ft.

4 ft. x 8 ft.

Thickness:

1/16" - 3/32"

\$9 USD ft²

Adhesive and sealant sold separately.



BLACK



INDIAN AUTUMN



INDIAN RUSTIC



TAN



SEE HOW THEY LOOK APPLIED



Energy saving



Clean work



Easy to carry



Resistant to extreme climate conditions



Flexible



Light weight



Quick installation



Water resistant



Impact resistant

QUARTZITES

3/32" thick sheets extracted from quartzite-type stone blocks, by a delamination process with fiberglass and resin, which in turn provide resistance, strength, support and flexibility.

Finish

Rustic, irregular and slightly shiny




Size:
2 ft. x 4 ft.
4 ft. x 8 ft.

Thickness:
1/16" - 3/32"

\$9 USD ft²

Adhesive and sealant sold separately.

-  Energy saving
-  Clean work
-  Easy to carry
-  Resistant to extreme climate conditions
-  Flexible
-  Light weight
-  Quick installation
-  Water resistant
-  Impact resistant

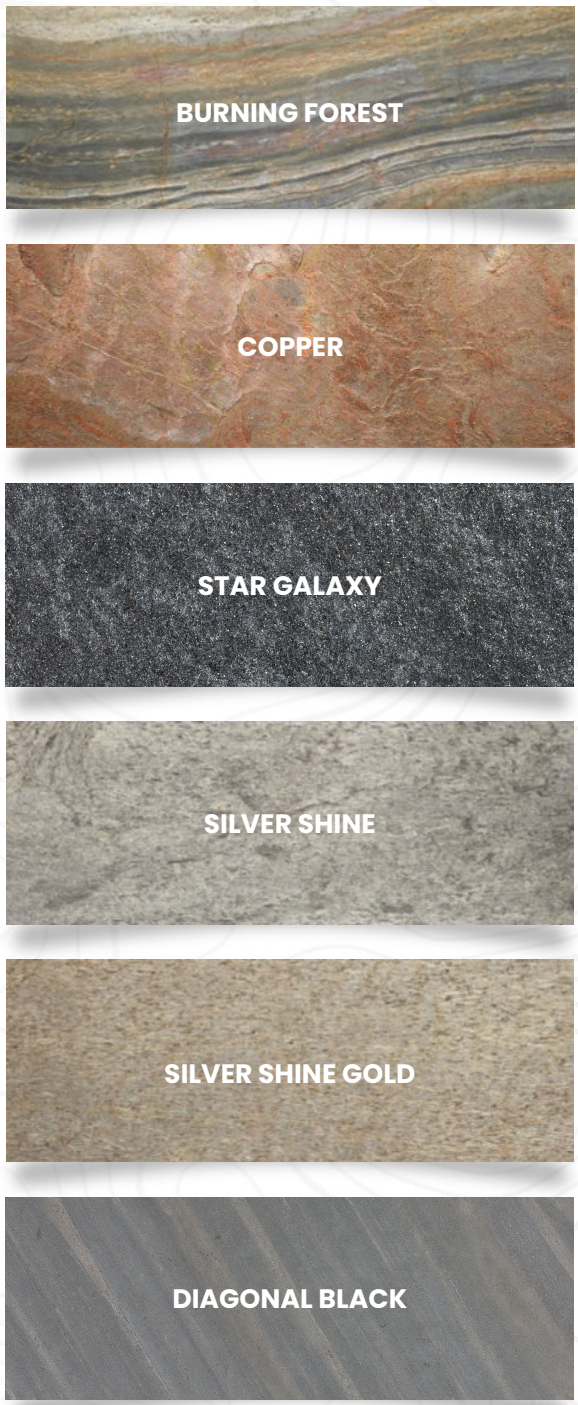

INDEX ▲


 SEE HOW THEY LOOK APPLIED

3D PEEL & STICK

Stone pieces of different thicknesses and formats adhered to a PVC foam film that allows rapid adhesion to surfaces that have anchorage capacity.

Finish

Varies according to the stone type




10 pcs x box

Size:
24 inch x 6 inch

Thickness:
1/16" - 3/32"

\$14 USD


sealant sold separately.

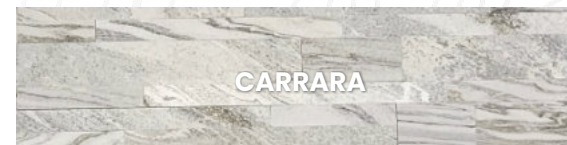


CARRARA



SILVER SHINE GOLD

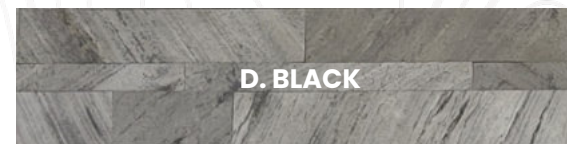

D. BLACK

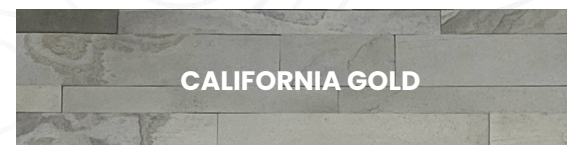

CALIFORNIA GOLD



BURNING FOREST



SEE HOW THEY LOOK APPLIED



Energy saving



Clean work



Easy to carry



Resistant to extreme climate conditions



Flexible



Light weight



Quick installation



Water resistant



Impact resistant

MARBLE

3/32" thick sheets extracted from marble-type sandstone blocks, by a delamination process with fiberglass and resin, which in turn provide resistance, strength, support and flexibility.

Finish




Rustic with nonuniform surface with varied veins, beautifully textured.



Size:
2 ft. x 4 ft.
4 ft. x 8 ft.
Thickness:
1/16" - 3/32"
\$9 USD ft²

Adhesive and sealant sold separately.

-  Energy saving
-  Clean work
-  Easy to carry
-  Resistant to extreme climate conditions
-  Flexible
-  Light weight
-  Quick installation
-  Water resistant
-  Impact resistant

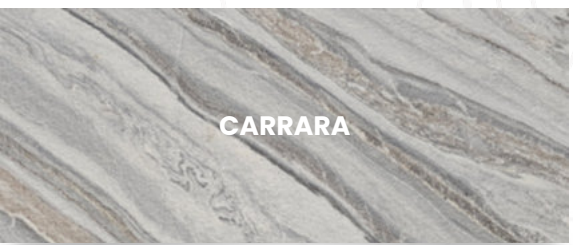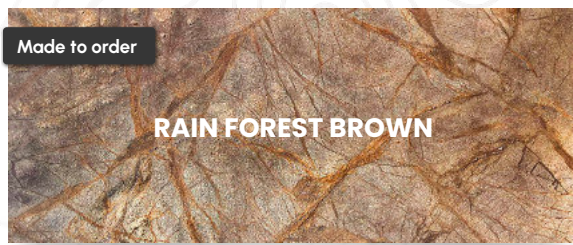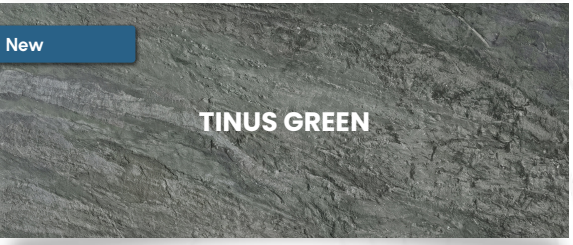 CARRARA	 Made to order RAIN FOREST BROWN
 New ANTARCTIC RAIN	 Made to order RAIN FOREST GREEN
 HIMALAYA GOLD	 New SNOW FOREST
 New TINUS GREEN	 Made to order SILVIA WHITE

 SEE HOW THEY LOOK APPLIED

TRANSLUCENT

KinglySlate® Translucent allows the allure of the stone and the elegance of the lighting to be part of the same product. Due to the gracefulness of its final appearance, it becomes the perfect alternative to be used in several design applications.

KinglySlate® Translucent should be applied to surfaces such as; polycarbonate, glass or acrylic.

Finish

Translucent, matte with an irregular surface with varied shades beautifully textured.




Size:
2 ft. x 4 ft.
4 ft. x 8 ft.

Thickness:
1/16" - 3/32"

\$9 USD ft²

Adhesive and sealant sold separately.

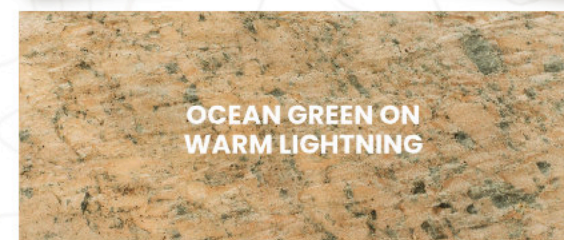

SEE HOW THEY LOOK APPLIED



CONCRETE

KinglySlate® Concrete is manufactured by pouring polymer concrete (resins and minerals) over fiberglass and resin. Subjected to a compaction and polishing process.

Finish

A smooth, matte surface featuring the organic pockmarks and irregularities inherent to concrete.



Size:

2 ft. x 4 ft.
4 ft. x 8 ft.

Thickness:

1/16" - 3/32"

\$9 USD ft²

Adhesive and sealant sold separately.



WHITE CONCRETE

DARK GRAY CONCRETE

MEDIUM GRAY CONCRETE



SEE HOW THEY LOOK APPLIED



Energy saving



Clean work



Easy to carry



Resistant to extreme climate conditions



Flexible



Light weight



Quick installation



Water resistant



Impact resistant



METAL

KinglySlate® Metal is made through a process called liquid metal finishing, where metal is sprayed on a substrate creating a thin layer of 3/32" thick. This technology opens the door to unlimited creations, designs and projects. It will definitely be the focus of attention of the place where it is installed.

Finish

Matte with characteristic reflections of shiny metal and carved patterns.



Size:

4 ft. x 8 ft.

Thickness:

1/16" - 3/32"

\$10 USD ft²

Adhesive and sealant sold separately.

- 

Energy saving
- 

Clean work
- 

Easy to carry
- 

Resistant to extreme climate conditions
- 

Flexible
- 

Light weight
- 

Quick installation
- 

Water resistant
- 

Impact resistant



CORTEN STEEL



LIQUID RUST



MURAL BLUE



MURAL WHITE



DIAMOND RUST




SEE HOW THEY LOOK APPLIED



WOOD

Flexible and lightweight polyester resin plank that creates a genuine wood appearance.



This remarkable material offers the natural look and feel of wood, while being significantly lighter and requiring far less maintenance than natural wood.



Size:
8 ft x 6" inch
Thickness:
1/16" - 3/32"
\$7.50 USD ft²

Adhesive and sealant sold separately.

-  Energy saving
-  Clean work
-  Easy to carry
-  Resistant to extreme climate conditions
-  Flexible
-  Light weight
-  Quick installation
-  Water resistant
-  Impact resistant

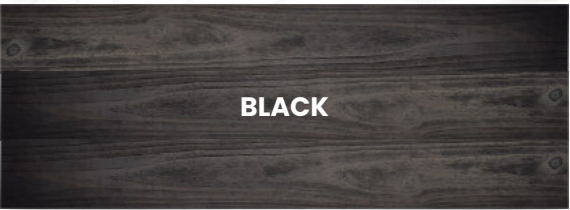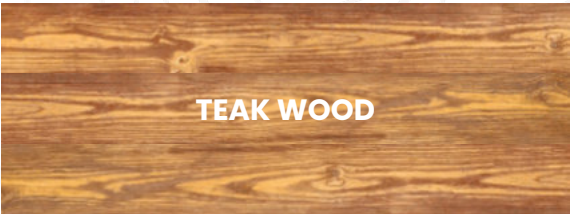

 SEE HOW THEY LOOK APPLIED




TRAVERTINE

Its classic and sophisticated finish makes it an ideal choice for interior walls, decorative projects, and architectural spaces seeking a refined and inviting style.

Finish

It features light beige tones with subtle veining that evoke timeless elegance and cosiness.



Size:

4 ft. x 8 ft.

Thickness:

1/16" - 3/32"

\$10 USD ft²

Adhesive and sealant sold separately.



Energy saving



Clean work



Easy to carry



Resistant to extreme climate conditions



Flexible



Light weight



Quick installation



Water resistant



Impact resistant



POLISHED



CLASSIC



FLUTED



SEE HOW THEY LOOK APPLIED






CLAY

KinglySlate® Clay line is composed of flexible sheets that include a layer of natural clay in their structure, giving them a unique and authentic appearance.

Finish

Matte with irregular surface characteristics according to the reference.



Specifications

Size:

2 ft. x 84 ft.


4 ft. x 8 ft.

Thickness:

1/8" - 1/15"

Weight:

0.31 - 0.33 lbs./ft.
(approx.)

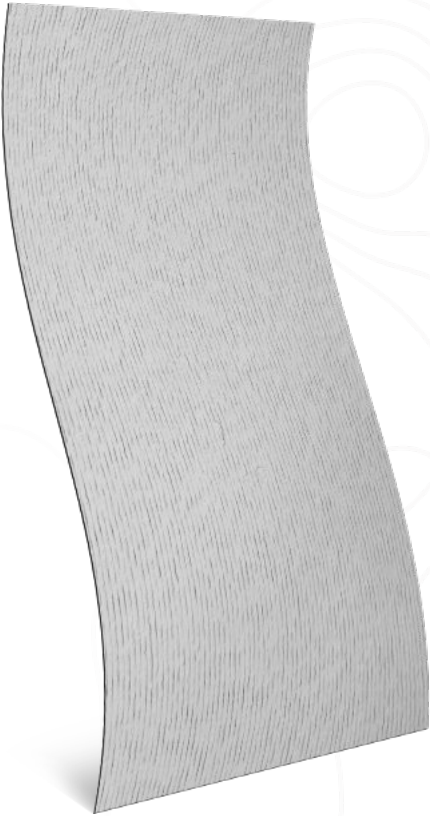

\$10 USD ft²



Energy saving



Clean work



Easy to carry



Resistant to extreme climate conditions



Flexible



Light weight



Quick installation



Water resistant



Impact resistant



SEE HOW THEY LOOK APPLIED



ACCESSORIES

Corner Trim

Protects the corners in your projects providing a perfect and elegant finish, it adds impact resistance for areas where extra durability is required.

Silver  Black  Sand  Bronze 

EXPANSION TRIM



Creates a perfect, subtle and elegant finish between the sheets. It enhances the tones through the contrast with the aluminum, has the exact thickness required for KinglySlate®, and is very easy to apply.

Silver  Black  Sand  Bronze 

END TRIM

The end trim allows you to carry an application only as far as desired, without the need to reach the end of the wall. It also enables the creation of strips and bolder contrasts by combining different textures and tones. Its height is ideal for KinglySlate®.

Silver  Black  Bronze 





KinglySlate®